


BREEZE

DPAR

T5 & T8 Surface Luminaire
with Double Parabolic Louvre

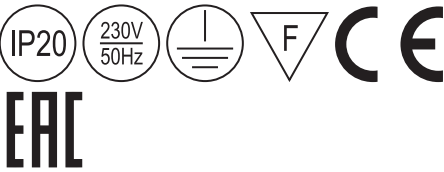

Type:	Surface mounted T5 or T8 luminaire with a double parabolic louvre.
Specification:	Shiny double parabolic louvre with 5 cross blades. Louvre is fitted into the body with locking safety clips for maximum stability. Fully enclosed painted steel body, wiring is concealed and not visible from ground level. Luminaire is plastic-wrapped and packed in twin boxes.
Installation:	Surface luminaire designed to be fixed to ceiling of any type.
Application:	Indoor. Office buildings, shops and other commercial environments.

Name	Lamp (W) and holder	Overall dimensions (LxWxH), mm	Weight, kg	Total wattage, W
Breeze 418 N16	4x18 (G13)	635x635x66	3,6	84
Breeze 236 N24	2x36 (G13)	1245x360x66	3,6	84
Breeze 414 N25	4x14 (G5)	635x635x66	2,8	62
Breeze 424 N26	4x24 (G5)	635x635x66	2,8	98
Breeze 228 N27	2x28 (G5)	1245x360x66	2,8	60
Breeze 254 N28	2x54 (G5)	1245x360x66	2,8	116

Options available on request:

- HF – High Frequency control gear
- DIM – Dimmable ballast 1-10V
- SDIM – Switch-control/dimming
- DALI – DALI ballast
- EMG – Emergency version 1 hour
- EM3 – Emergency version 3 hour
- 5TB – 5 way terminal block for loop feed and ease of wiring
- MAT – Matted reflector
- NCP – Low Power Factor

BREEZE 236 N24 HF

