

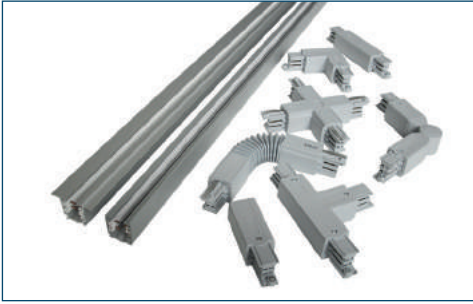


GLOBAL TRACK PRO

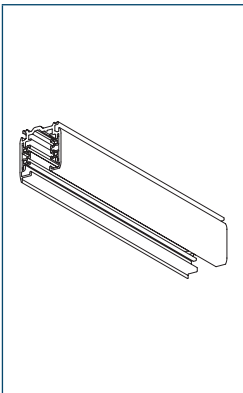

- the most popular three-circuit track
- circuits can be controlled individually
- easy to mount and change position
- modular solution, easy to extend/adapt
- suitable for department stores and shops
- recessed version also available

THE THREE-CIRCUIT LIGHTING TRACK CONNECTION DIAGRAM

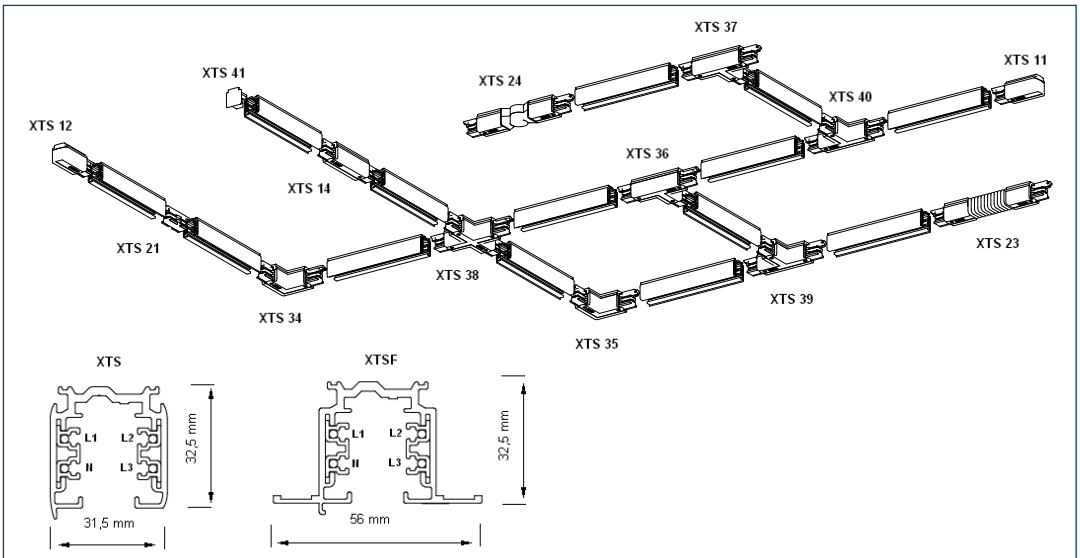

Article: XTS 4100-4400

Surface track – three-circuit surface track.

Colour options: Natural anodized aluminium, white (RAL 9010), black (RAL 9005).

Dimensions:

XTS 4100 H32.5xW31.5xL1000 mm

XTS 4200 H32.5xW31.5xL2000 mm


XTS 4300 H32.5xW31.5xL3000 mm

XTS 4400 H32.5xW31.5xL4000 mm

Possible connections:

1-phase, 3-circuit 230V AC, 16A, 3.7kVA IP 20

3-phase, 3-circuit 230/400V AC, 16A, 3x3.7kVA IP 20



Article: XTSF 4100-4400

Recessed track – three-circuit recessed track.

Colour options: Natural anodized aluminium, white (RAL 9010), black (RAL 9005).

Dimensions: H32.5xW56xL1000/2000/3000/4000 mm



Possible connections:

1-phase, 3-circuit 230V AC, 16A, 3.7kVA IP 20

3-phase, 3-circuit 230/400V AC, 16A, 3x3.7kVA IP 20

Use of L – and T – accessories


Red line indicates polarity ridge

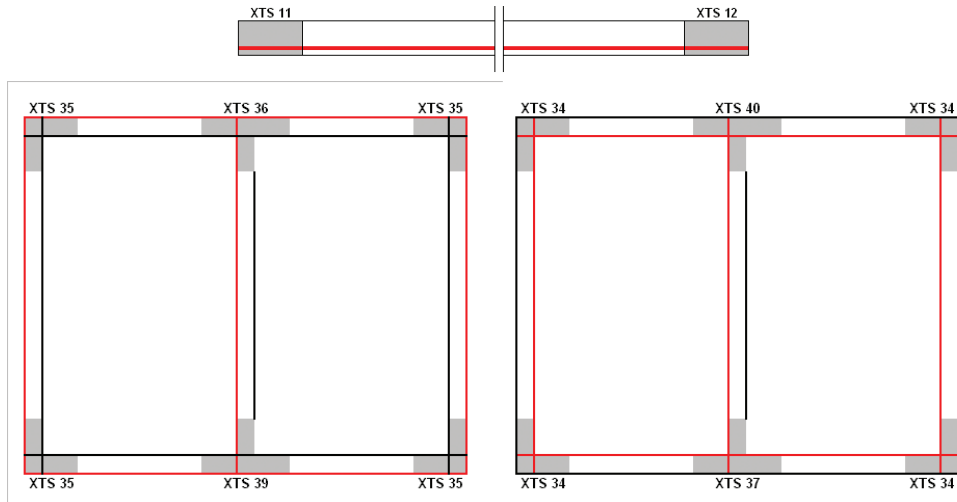

Article: XTS 11, 12

End-feed – used to feed track from the end chosen, these could have 2 different polarity ridges.


Colour options: Grey (RAL 7040), white (RAL 9010), black (RAL 9005).



Article: XTS 14

Middle-feed – used to feed track from the point chosen, these have 1 polarity ridge.


Colour options: Grey (RAL 7040), white (RAL 9010), black (RAL 9005).



Article: XTS 23


Flexible middle-feed – used to obtain angle needed, these have 1 polarity ridge.

Colour options: Grey (RAL 7040), white (RAL 9010), black (RAL 9005).




Article: XTS 24

Adjusting middle-feed – used to obtain angle needed, these have 1 polarity ridge.
Colour options: Grey (RAL 7040), white (RAL 9010), black (RAL 9005).




Article: XTS 34, 35

L-feed – used to make track turn, these could have 2 different polarity ridges.
Colour options: Grey (RAL 7040), white (RAL 9010), black (RAL 9005).




Article: XTS 36, 37, 39, 40

T-feed – allows distributing through 3 branches, these could have 4 different polarity ridges.
Colour options: Grey (RAL 7040), white (RAL 9010), black (RAL 9005).




Article: XTS 38

X-feed – allows distributing through 4 branches, these have 1 polarity ridge.
Colour options: Grey (RAL 7040), white (RAL 9010), black (RAL 9005).




Article: XTS 21

Straight connector – allows connecting tracks together.
Colour options: Grey (RAL 7040), white (RAL 9010), black (RAL 9005).



Article: XTS 41

End cap – used to secure live ends of track.
Colour options: Grey (RAL 7040), white (RAL 9010), black (RAL 9005).




Article: GA 70

FIX point – used for single track light installation at point chosen.
Colour options: Grey (RAL 7040), white (RAL 9010), black (RAL 9005).


The suspension applications for track system

Available colours for parts: 1 grey (RAL 7040), 2 – black (RAL 9005), 3 – white (RAL 9010)

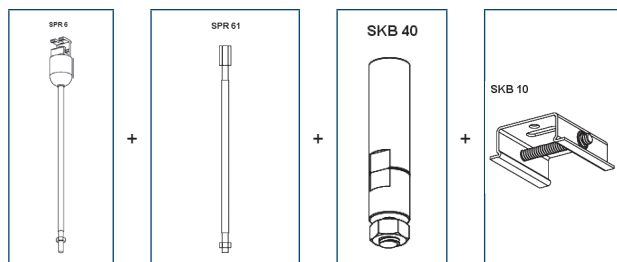


Rod suspension application with rod extension set or without:

SPR 6 1000mm
SPR 61 1000mm

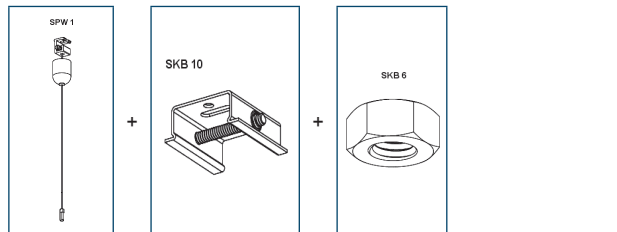


Wire suspension application with wire suspension set:

SPW 1 1500mm

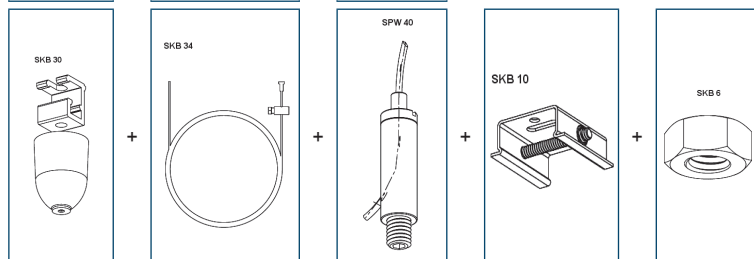


Wire suspension application with fast mounting "click" and optional wire length:


SKB 34-1 1500mm
SKB 34-1/3m 3000mm
SKB 34-1/5m 3000mm

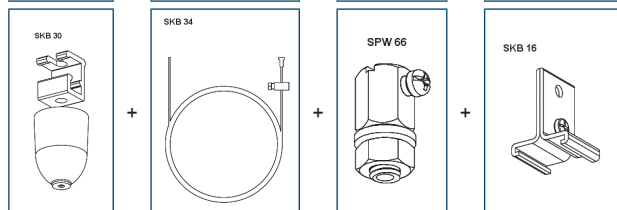

Wire suspension application with "T" clamp and optional wire length

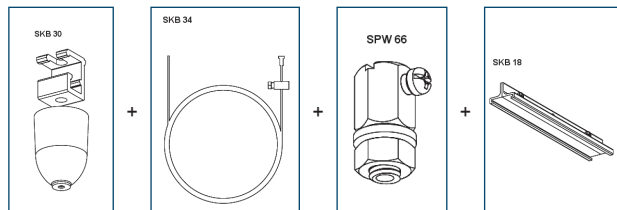

Wire suspension application with "T" clamp for track connection and optional wire length



Wall fixing bracket application:
SKB 21